



Cool, Stylish, Italian.



LASER 6 MASTER

DATI TECNICI • TECHNICAL DATA.

Potenza assorbita dal compressore : 409 W

Compressor Electrical power : 409 W


Potenza resa dal compressore : 963 W

Compressor refrigerating power : 963 W

Classe climatica • *Climatic class* : T (43°)

Peso • *Weight* : 215 Kg

Dimensioni • *Dimensions* : 743 x 815 x 1830 mm

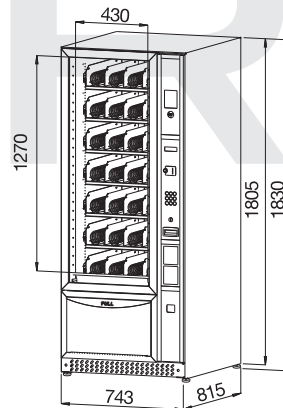

ROBUSTEZZA STRUTTURALE • STRUCTURAL STRENGTH

La struttura del Laser è monolitica, isolata in poliuretano bicomponente iniettato a caldo, ecologico e riciclabile. Gli spessi rinforzi perimetrali, la chiusura a 4 punti della colonna comandi, lo sportello di prelievo in acciaio, le robuste staffe di fissaggio a muro rendono il Laser idoneo ad un uso gravoso.

Laser structure is a monolithic body with bicomponent polyurethane insulation, hot injected, ecological and recyclable. Thick steel perimetric reinforcements, 4 points closure of the control column, steel delivery hatch, robust brackets for fixation to the wall give Laser a heavy use good resistance.

CONSUMI ENERGETICI • ELECTRICAL CONSUMPTION

Il gruppo frigorifero di altissima efficienza, l'isolamento maggiorato della scocca e la porta a vetri basso emissivi con intercapedine di gas argon, riducono i consumi energetici del 60% rispetto allo standard.

Its very high efficiency refrigerant unit, the body insulation system and low-emissive glass door with argon gas reduce electrical consumption of 60% of the standard value.

POTENZA REFRIGERANTE e FLESSIBILITÀ • REFRIGERATION POWER AND FLEXIBILITY

Tutti i ripiani possono essere refrigerati a 0° oppure suddivisi fino a 3 temperature nettamente differenziate.

All the shelves can be cooled either at 0° or divided in 3 clearly different temperatures.

PROTOCOLLI • PROTOCOLS

Parallelo, Executive/price holding, MDB/master-slave. Aggiornamenti del programma e configurazioni macchina con chiave USB.




Parallel, Executive/price holding, MDB/master-slave. Easy download of firmware and machine configuration by USB key.



Gruppo frigorifero estraibile e senza manutenzione.
Extractable and maintenance-free refrigerating unit.



Vano di prelievo prodotto ammortizzato in acciaio.
Steel product delivery hatch with damper.

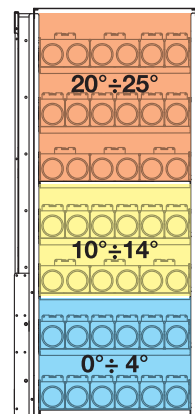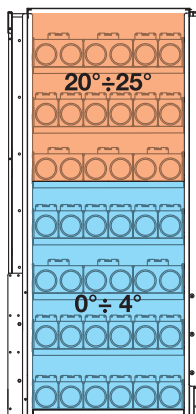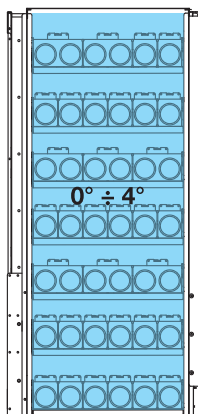

Esempi di suddivisione delle temperature. • *Temperature set-up possibilities.*